

TYPICAL PANEL GROUPS AND OPERATIONS




SPECIFICATIONS

PLAN VIEW


TYPE 2MC

Top supported, manually operated, continuously hinged, center stacked in relation to track centerline with alternating panels suspended from one four-wheel trolley. No floor track required.

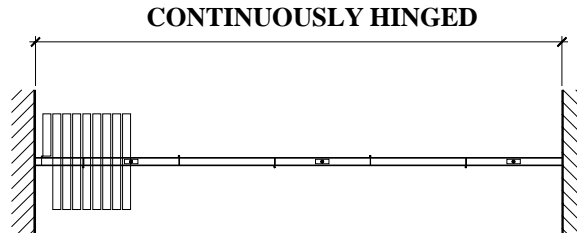



TYPE 2EC

Top supported, electrically operated, continuously hinged, center stacked in relation to track centerline with alternating panels suspended from one four-wheel trolley. No floor track required except a guide track beneath the "stack" or within the storage pocket.

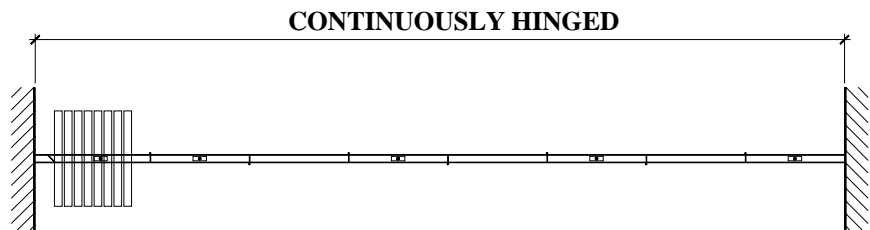


TYPE 3MC

Top supported, manually operated, segmented in groups of two (2) or three (3) panels, center stacked in relation to track centerline with each panel suspended from one four-wheel trolley. No floor track required.

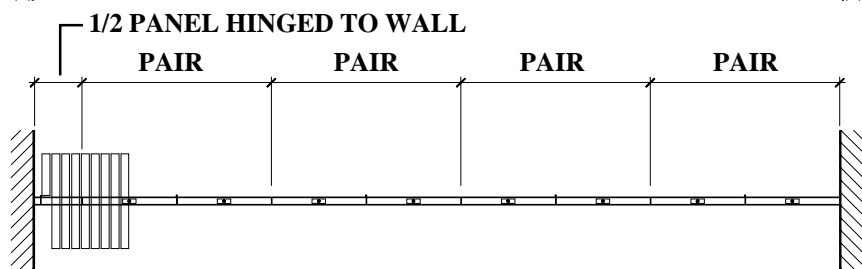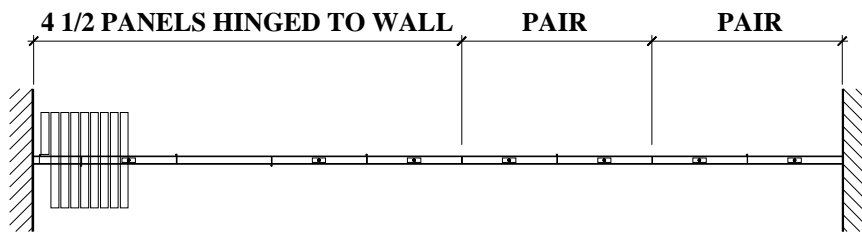

TYPE 9MC

Floor supported, top guided, manually operated, segmented in groups of two (2) or three (3) panels, center stacked in relation to track centerline with each panel supported on two-wheel floor rollers and top guided by four-wheel trolleys. Floor track required.

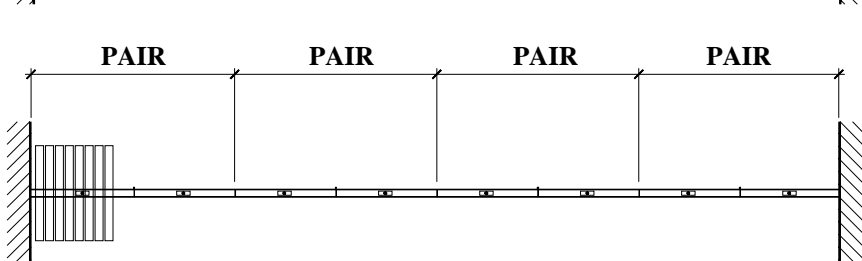

TYPICAL PANEL GROUPS AND OPERATIONS




SPECIFICATIONS

PLAN VIEW


TYPE 5MS

Top supported, manually operated, individually suspended rolling panels, each equipped with two trolleys, side stacked in relation to track centerline. No floor track required.

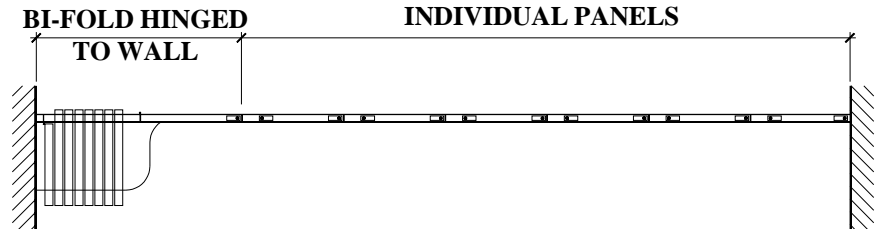


TYPE 5MR

Top supported, manually operated, individually suspended rolling panels, each equipped with two trolleys. (See "Track Systems for additional remote stacks.) Remote stacking, no floor track required.

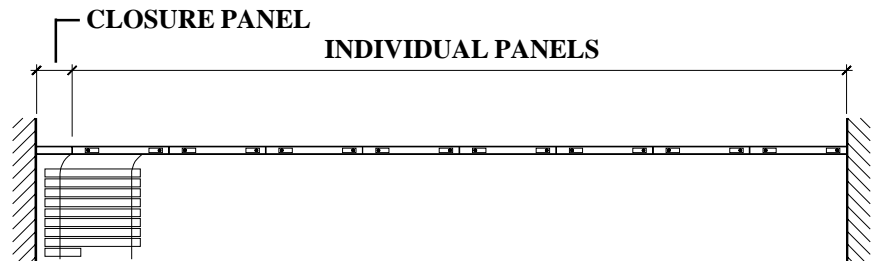

TYPE 3MS

Top supported, manually operated, segmented in groups of two (2) panels, side stacked in relation to track centerline with each panel suspended from one four-wheel trolley. Floor track required.

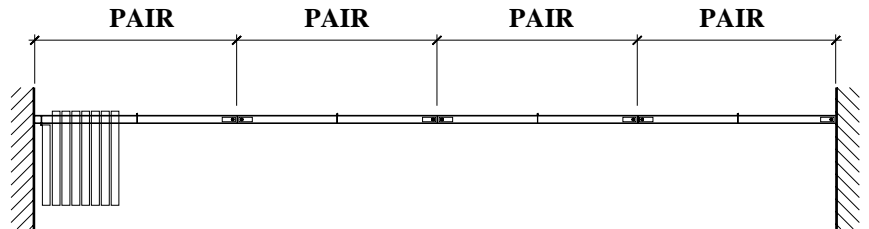

TYPE 9MS

Floor supported, top guided, manually operated, segmented in groups of two (2) panels, side stacked in relation to track centerline with each panel supported on two-wheel floor rollers and top guided by four-wheel trolleys. Floor track required.

NOTE: The above layouts depict **mono-fold** operation (folding one direction to jamb). Any of these may be **bi-parting** operation (folding two directions to jamb).

